



LET'S BUILD A BETTER FUTURE

FRONT ENTRY / **AG** series



Comfort is just a step away

Front entry doors, aren't they one of the most important parts of our home? They protect us from the cold, from the rain or the burglars, to mention just these examples. Doors also keeps us away from street noise. But how do you make the right choice, and buy a door that will meet our expectations and serve us for years? An issue that requires careful consideration

before the purchase is the heat transfer coefficient (U). The lower its value, the more heat will stay with us inside. ARKA offers panelled doors with the U_d coefficient of 0.44 W/(m²K).

When choosing our door, let's not forget to check out their water resistance. It's the water resistance of the door that will keep the driving rain outside in times of strong winds and heavy rain. Water resistance of the front entry door is rated from 3A to 9A. The higher the class, the better the door protects our home. ARKA offers panelled doors rated 7A.

Infill panels are included in door leaves based on the MB-70, MB-70HI, MB-86 & MB-104 Passive system, and come in a variety of colours and structures. The elements can be milled, decorated with inlays or made of insulated glass. Panelled doors can be fabricated very large and high – up to 1.40 m (W) and almost 2.60 m (H). If, therefore, we dream of an impressive front entrance, this will be the perfect choice. But above all, the door should fit to the style of your home. If our interiors are the traditional ones, we should opt for a leaf with glass panels or wooden-like veneer. Lovers of modern interior can choose among RAL colours, think shade of graphite.

Let's take some time and choose a door with which we will create a beautiful entrance that will enchant our guests and will make us feel like we were in a safe haven.

MB-104 Passive

U_D from **0.08** BTUs/ ft²-hr-°F

ARKA's panel door uses thermally insulated aluminium profile system – MB-104 Passive is the most technologically advanced door system offered by ARKA. The leaf profile can be combined with special infills, aligned with the surface of the frame. The system is dedicated to passive and energy-efficient buildings.


Elegant decorative panels, available in many different patterns and RAL colours and wood effect finishes

Joint membrane

Expansion profiles

Design variants: SI, SI+ and AERO

Central gaskets around the leaf and the frame to seal, cover, and increase the thermal insulation of the door

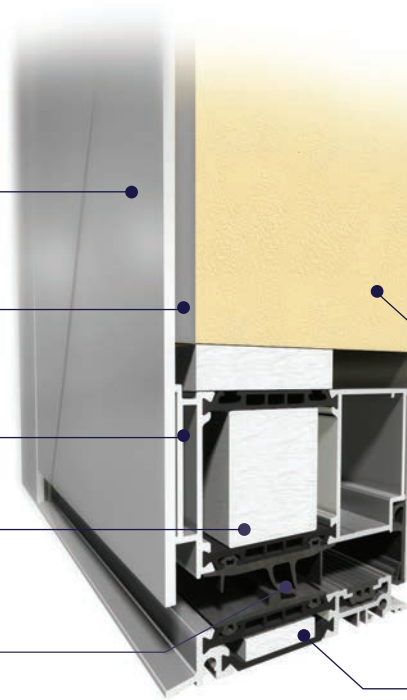

Technical details:

Frame depth	95 mm
Leaf depth	95 mm
Infill panel thickness	44 - 95 mm
Maximum dimensions of the leaf	(HxL) L up to 1400 mm, H up to 2600 mm

Technical parameters:

Air permeability	Class 3, PN-EN 12207:2001
Water tightness	Class E1200 (1200 Pa), PN-EN 12208:2001
Wind load resistance	Class C4/B4, PN-EN 12210:2001
Thermal insulation	U_D from 0,44 W/m ² K
Burglary-resistance	RC2

XPS extruded polystyrene with enhanced thermal insulation

95 mm-wide warm threshold -the same width as the threshold and frame

MB-86

U_D from 0.11 BTUs/ft²-hr-°F

ARKA's panel doors use thermally insulated aluminium profile system – MB-86 – which, just like the MB-104 Passive system, is dedicated to energy-efficient and passive building. The leaf profile can be combined with special infills, aligned with the surface of the frame.

Technical details:

Frame depth	77 mm
Leaf depth	77 mm
Infill panel thickness	44 - 77 mm
Maximum dimensions of the leaf	(H x L) L up to 1400 mm, H up to 2600 mm

Technical parameters:

Air permeability	Class 3, PN-EN 12207:2001
Water tightness	Class E900 (900 Pa), PN-EN 12208:2001
Wind load resistance	Class C5/B5, PN-EN 12210:2001
Thermal insulation	U_D from 0.66 W/m ² K
Burglary-resistance	RC2

Elegant decorative panels, available in many different patterns and RAL colours and wood effect finishes

Joint membrane


Expansion profiles

They come in four versions: ST, SI, SI+ and AERO for a very good thermal performance

XPS polyurethane foam ensures an excellent thermal insulation

Rigid and durable aluminium profiles permit the fabrication of large dimensioned doors

Specially designed weather strips provide high water tightness and low air permeability, bringing both a comfort and a potential for cost savings

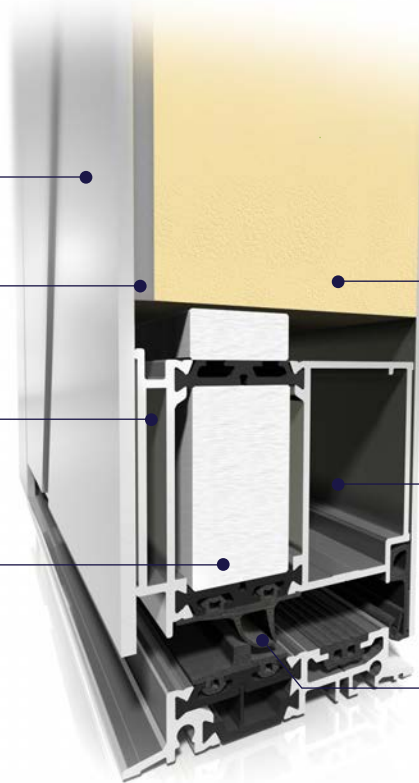

MB-70

U_D from **0.16** BTUs/ ft²-hr-°F


The structure of panel doors is based on the popular thermally broken aluminium sections MB-70 and MB-70HI which complete the range of energy-efficient doors in the ARKA portfolio. Similarly to other panel door system the leaf profile is designed for coupling with special infill panels that can be installed flush with the door frame plane.

Elegant decorative panels, available in many different patterns and RAL colours and wood effect finishes

Joint membrane

Expansion profiles

Two design variants: MB-70 and MB-70HI for a very good thermal performance

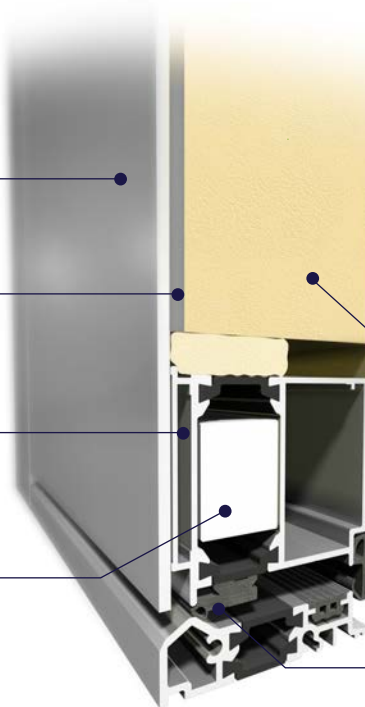

Technical details:

Frame depth	70 mm
Leaf depth	70 mm
Infill panel thickness	44 -70 mm
Maximum dimensions of the leaf	(H x L) L up to 1200 mm, H up to 2400 mm

Technical parameters:

Air permeability	Class 4, PN-EN 12207:2001
Water tightness	Class 7A (300 Pa), PN-EN 12208:2001
Wind load resistance	Class C5/B5, PN-EN 12210:2001
Thermal insulation	U_D from 0.9 W/m ² K
Burglary-resistance	RC2

XPS extruded polystyrene with enhanced thermal insulation

Specially designed weather strips provide high water tightness and low air permeability, bringing both a comfort and a potential for cost savings




BASIC



Insert panels

- Triple glazing units, U_g coefficient of U_g 0.5 W/m²K or of 0.7 W/m²K
- 44 and 52 mm thick panels
- Thermal transmittance for MB-70HI doors U_D from 1.3 W/m²K, for MB-86 doors U_D from 0.8 W/m²K, and for MB-104 doors U_D from 0.63 W/m²K
- Product variants: ST, HI, SI, SI+ and Aero

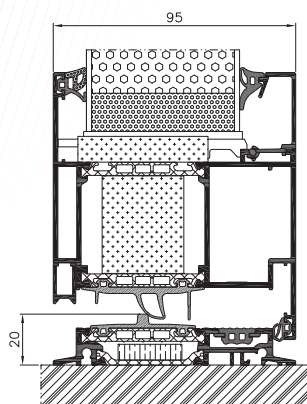


CLASSIC



Aligned on one side

- Triple and quadruple glazing units, U_g coefficient of U_g 0.5 W/m²K or of 0.7 W/m²K
- 44 and 65 mm thick panels
- Thermal transmittance for MB-70HI doors U_D from 1.10 W/m²K, for MB-86 doors U_D from 0.64 W/m²K, and for MB-104 doors U_D from 0.48 W/m²K
- Product variants: ST, HI, SI, SI+ and Aero

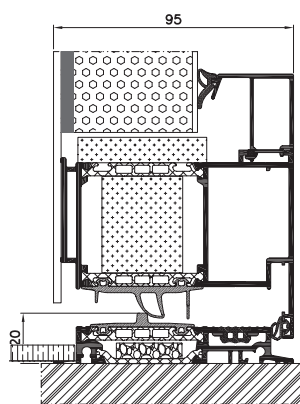


EXCLUSIVE



Aligned on both sides

- Quadruple glazing units, U_g coefficient of U_g 0.5 W/m²K or of 0.7 W/m²K
- 70 mm thick panel (MB-70 and MB-70HI), 77 mm (MB-86) and 95 mm (MB-104 Passive)
- Thermal transmittance for MB-70HI doors U_D from 0.9 W/m²K, for MB-86 doors U_D from 0.63 W/m²K, and for MB-104 doors U_D from 0.44 W/m²K
- Product variants: ST, HI, SI, SI+ and Aero

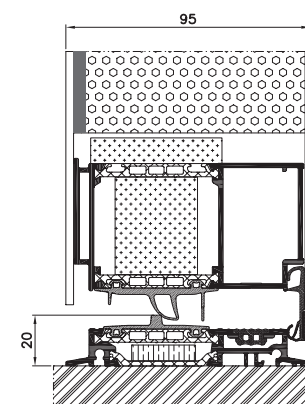


All available models can be inserted into the profiles or glued on one or both sides.




AG01
page 10




AG01B
page 10

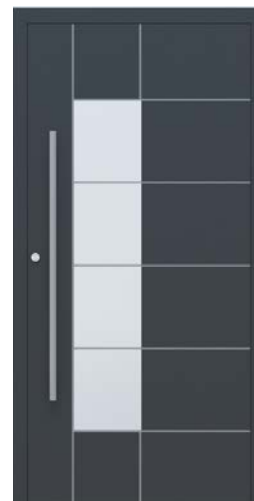

AG02
page 10

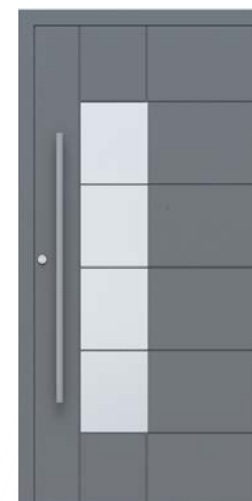


AG02B
page 11

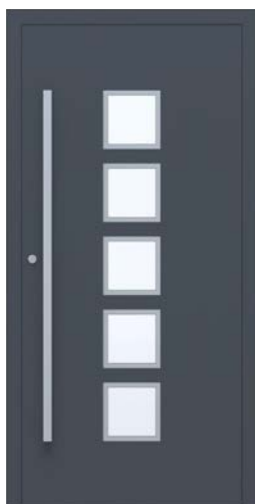

AG03
page 12



AG03B
page 12

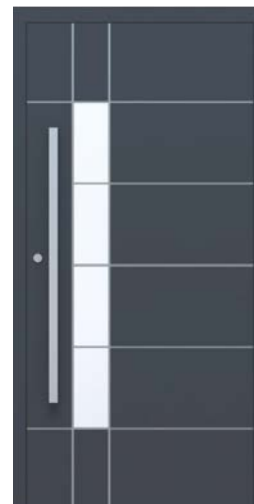

AG04
page 12



AG04B
page 13



AG05
page 14




AG05B
page 14



AG06
page 14



AG07
page 15

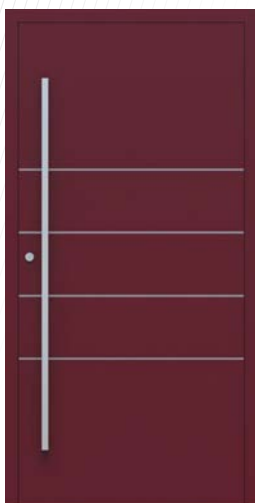

AG08
page 16



AG08B
page 16



AG09
page 16



AG010
page 17



AG01

- AQ 10 1600 door pull handle made of high-grade steel
- Glazing (front): VSG 33.1
- Glazing (center): sandblasted glass
- Inlay: flush inox inlay
- Colour: RAL 7016



AG01B

- AS 10 1400 door pull handle made of high-grade steel
- Glazing (front): VSG 33.1
- Glazing (center): sandblasted glass
- Inlay: milled
- Colour: RAL 9007



AG02

- AQ 10 1200 door pull handle made of high-grade steel
- Glazing (front): VSG 33.1
- Glazing (center): sandblasted glass with transparent strips
- Inlay: flush inox inlay
- Colour: RAL 7016



AG02B

- AS 10 1200 door pull handle made of high-grade steel
- Glazing (front): VSG 33.1
- Glazing (center): sandblasted glass with transparent strips
- Inlay: milled
- Colour: RAL 9007





AG03

- AQ 10 1600 door pull handle made of high-grade steel
- Glazing (front): VSG 33.1
- Glazing (center): sandblasted glass
- Inlay: flush inox inlay
- Colour: RAL 7016



AG03B

- AQ 10 1600 door pull handle made of high-grade steel
- Glazing (front): VSG 33.1
- Glazing (center): sandblasted glass
- Inlay: milled
- Colour: RAL DB703



AG04

- AQ 10 1200 door pull handle made of high-grade steel
- Glazing (front): VSG 33.1
- Glazing (center): sandblasted glass with transparent strips
- Inlay: flush inox inlay
- Colour: RAL 7016



AG04B

- AS 10 1200 door pull handle made of high-grade steel
- Glazing (front): VSG 33.1
- Glazing (center): sandblasted glass with transparent strips
- Inlay: milled
- Colour: RAL 9007





AG05

- AQ 10 1600 door pull handle made of high-grade steel
- Inlay: flush inox inlay
- Colour: RAL 7016



AG05B

- AW 10 door pull handle made of high-grade steel
- Inlay: milled
- Colour: RAL 9007



AG06

- AS 10 800 door pull handle made of highgrade steel
- Glazing (front): VSG 33.1
- Glazing (center): sandblasted glass with transparent strips
- Colour: RAL 7001



AG07

- Door pull handle, high-grade steel:
AQ 10 1000, RAL 9005
- Inlay: milled
- Colour: ADEC D207 Winchester





AG08

- AQ 10 1600 door pull handle made of high-grade steel
- Inlay: flush inox inlay
- Colour: RAL 3004



AG08B

- AS 10D 1600 door pull handle made of high-grade steel
- Inlay: milled
- Colour: RAL 9007



AG09


- AQ 10 1600 door pull handle made of high-grade steel
- Colour: RAL 9006



AG10

- 1600 flush pull handle in RAL colour of your choice
- Colour: RAL 7016




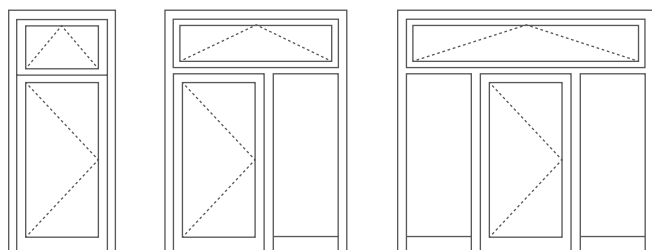

1

2

3

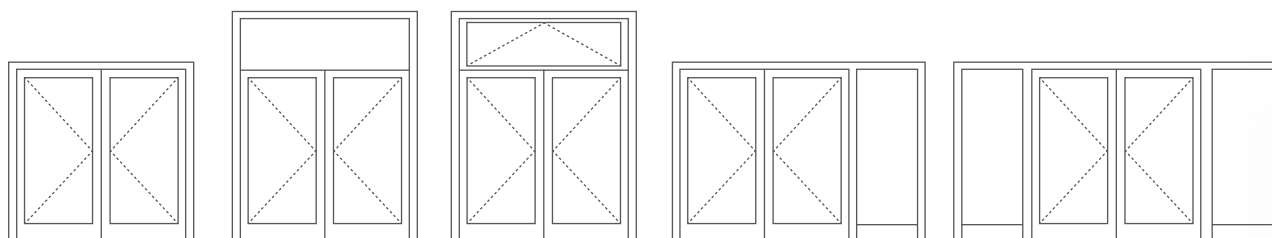


4

5

6

7

8

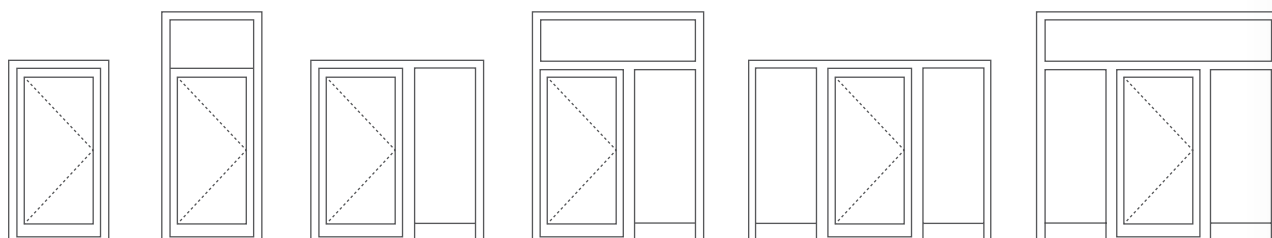

9

10

11

12


13

14




// Pulls*

● stainless steel ● black

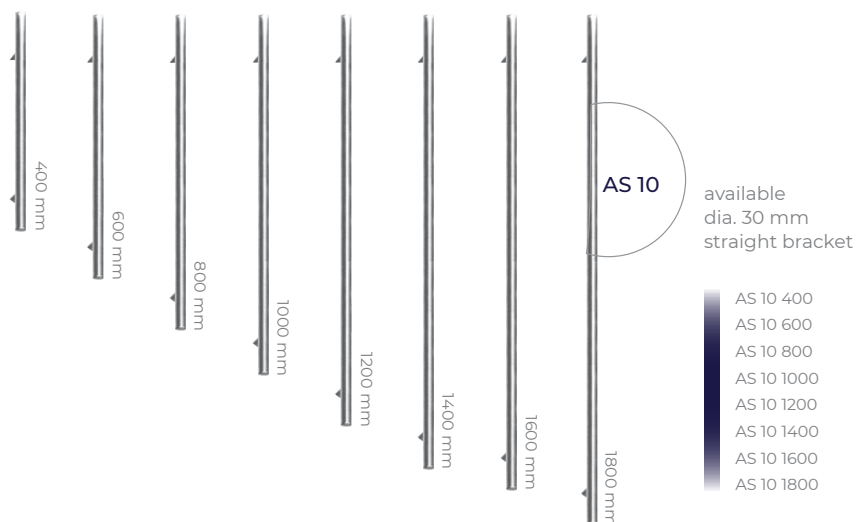


● stainless steel ● black

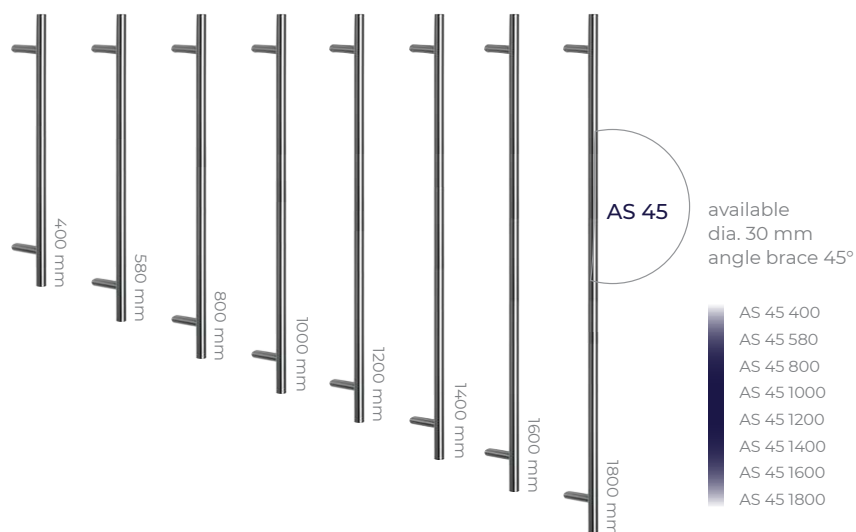


// Pulls*

● stainless steel ● black

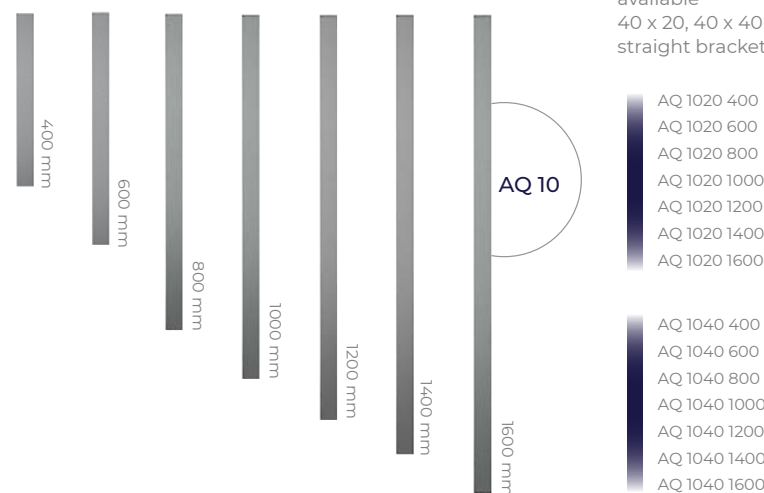


● stainless steel ● black

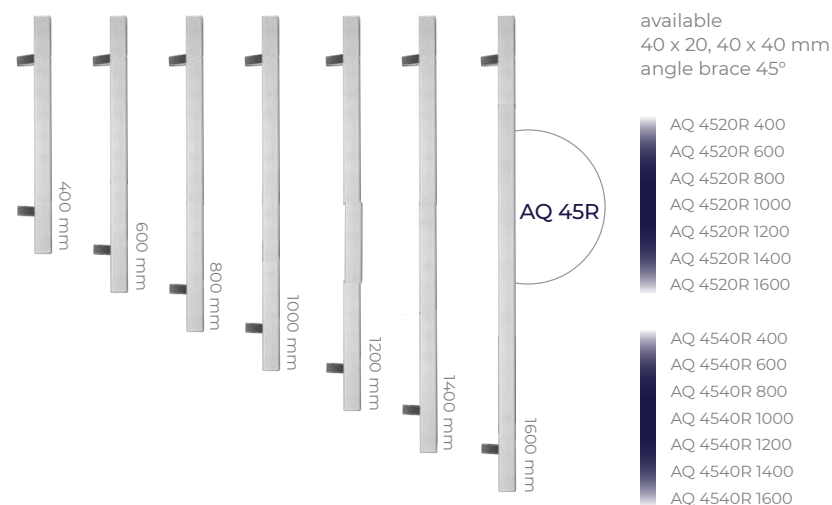

* Mounting kit included - see the price list for details.

// Pulls*

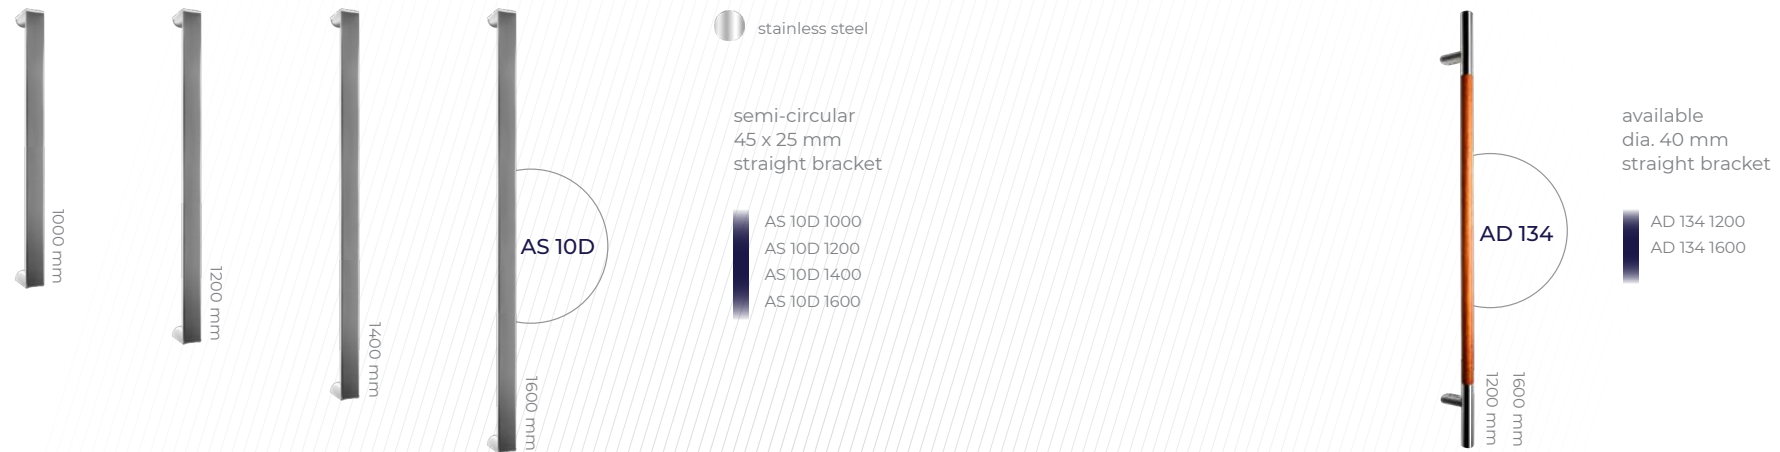

// Flush pull handles



// Lever pull

ARKA STYLE

1924216X: stainless steel,
natural anode and inox,
white, anthracite, black



ARKA STYLE

1924218X: stainless steel,
natural anode and inox,
white, anthracite, black



1924231X: stainless steel,
natural anode and inox,
white, anthracite, black

ARKA LINE

1924220: stainless steel, natural
anode and inox, white,
anthracite, black



ARKA LINE

1924229X: stainless steel,
natural anode and inox,
white, anthracite, black



1924231X
stainless steel, natural
anode and inox, white,
anthracite, black

ARKA CLASSIC

1924111X: RAL



1924113X
RAL

FAPIM

8001289X: natural anode,
RAL



1924113X
RAL

SOBINCO HORIZON

8000997X: natural anode,
anode inox, RAL





SOBINCO EDGE

8H00127X: natural anode,
anode inox, RAL




// Rosettes

-  stainless steel
-  black

AGR 10




// Kickplates



Flush or glued
kickplate AK 130

130 mm high



Flush or glued
kickplate AK 60

60 mm high

// Scratch protection



AB 01

W 50 x H 100 mm



AB 02

W 50 x H 100 mm



AB 03

W 50 x H 100 mm



AB 04

W 100 x H 50 mm

// Ornaments



Master-Point



Satinata



Master-Ligne



Master-Carre

ARKA offers a wide range of glass with motif, glass made of transparent or ornamental glass in its most popular models.

All door models come in variants with sidelight and toplight.

Variant 1: Sandblasted glass (motif)

Variant 2: Transparent glass

Variant 3: Ornamental glass

Variant 4: Safety glass

Sidelights and fixed lights include triple glazing units with warm glass spacers. Sidelights (fixed glazing) can be placed either on one or on both sides of the door assembly.

Maximum sidelight width: 1400 mm

Ornaments (optional):

“Master-Point”

“Satinata”


“Master-Ligne”

“Master-Carre”

Other ornamental glass available on request.

For details, contact our sales representatives.

// Wood effect / Concrete effect

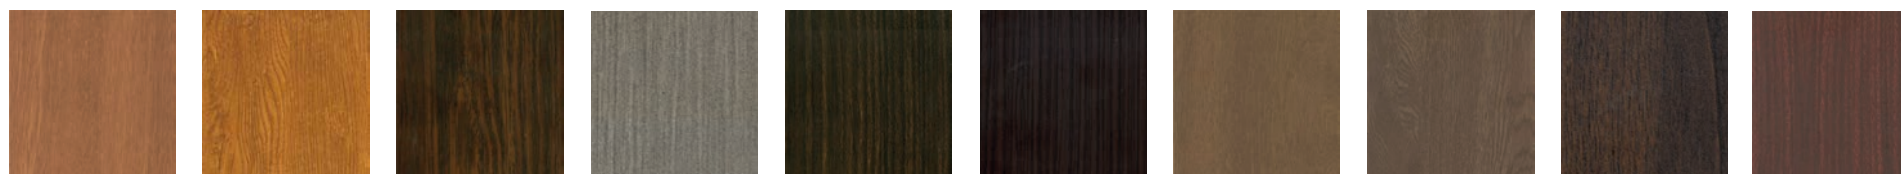Golden Oak
ADEC D101Rustic Oak
ADEC D210Swamp Oak
ADEC D502Vintage Oak
ADEC D825Ebony
ADEC M102Palisander
ADEC M332Walnut
ADEC O102Walnut Vein
ADEC O205Dark walnut
ADEC O306Mahogany
ADEC M103Mahogany Sapeli
ADEC M204Pine
ADEC S106Pine
ADEC S110Fir
ADEC J107Fir
ADEC S208Beech
ADEC B108Cherry
ADEC W109Wenge
ADEC W205Winchester
ADEC D207Gean
ADEC C110

// RAL & structural colours*

Gean
ADEC C212Dark Cherry
ADEC C106Chestnut
ADEC K101Concrete
ADEC E137

* All RAL colours and structural colours as per the offer.
The colours may vary slightly from the finished product.



ARKA Luxury Windows Doors Inc

2915 Red Hill Ave #107

Costa Mesa, CA 92626

info@arkawindowsdoors.com

+1(949) 922-3747